



NTO-G Spiral duct

NTO-G spiral ducts are made from low CO₂ emission XCarb® steel, resulting in a carbon footprint up to 64% lower compared to a standard NTO spiral duct. XCarb® steel contains at least 75% recycled material, and 100% renewable energy is used in its production, significantly reducing the environmental impact of products made from this material compared to conventional steel. The standard lengths are 3 and 6 m, and the spiral ducts meet M1 cleanliness class and airtightness class D requirements.

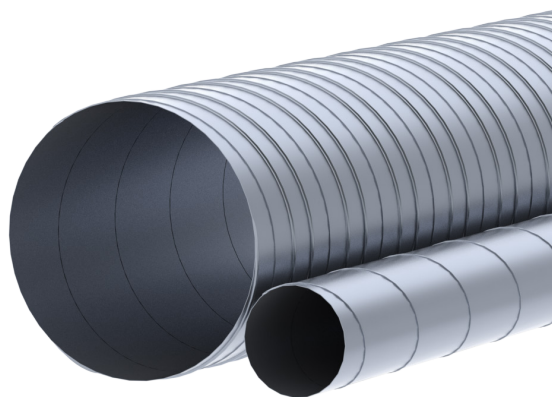

Nominal size d (mm)	Material thickness t (mm)	Weight (kg/m)
80	0,5	0,9
100	0,5	1,3
125	0,5	1,6
160	0,5	2,1
200	0,5	2,6
250	0,5	3,3
315	0,5	3,9
400	0,7	7,9
500	0,7	10,0
630	0,7	12,0
800	0,7	15,2
1000	0,9	25
1250	0,9	31
1600	1,0	45

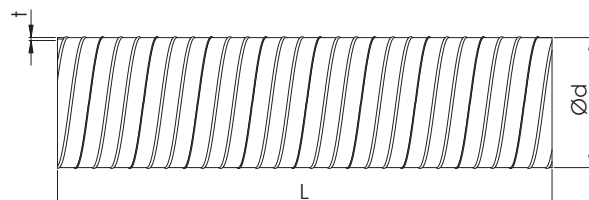

Duct profiles


Measurements 100-250 mm



Measurements 315-1250 mm



Product codes

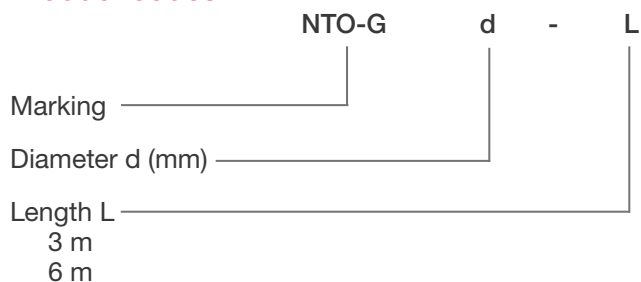

Example: NTO-G 315-3