



NPS Sadelavstick

Nominell dimension D-d	h (mm)	l _p (mm)	Vikt (kg)
80/80	52	35	0,12
100/80	60	35	0,11
100/100	65	35	0,14
125/80	75	35	0,12
125/100	78	35	0,13
125/125	80	35	0,21
160/80	92	35	0,11
160/100	95	35	0,12
160/125	97	35	0,19
160/160	109	35	0,34
200/80	112	35	0,11
200/100	115	35	0,12
200/125	117	35	0,17
200/160	129	35	0,29
200/200	133	35	0,46
250/100	140	35	0,12
250/125	142	35	0,17
250/160	154	35	0,29
250/200	158	35	0,41
250/250	136	35	0,63
315/100	173	35	0,12
315/125	175	35	0,17
315/160	187	35	0,27
315/200	191	35	0,41
315/250	169	35	0,50
315/315	179	35	0,85
400/100	215	35	0,12
400/125	217	35	0,15
400/160	229	35	0,25
400/200	233	35	0,37
400/250	211	35	0,49
400/315	221	35	0,68
500/100	265	35	0,12
500/125	267	35	0,15
500/160	279	35	0,25
500/200	270	35	0,48
500/250	285	45	0,69
500/315	285	45	0,85
630/100	351	35	0,12
630/125	351	35	0,15
630/160	335	35	0,48
630/200	335	35	0,48
630/250	350	45	0,69
630/315	350	45	0,85

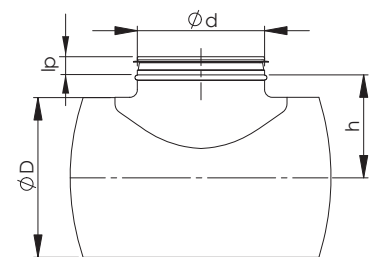

Markering

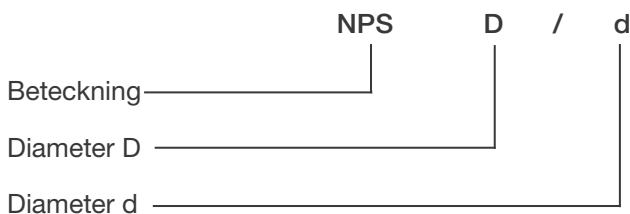

Exempel: **NPS 315/250**