


EKT Duct

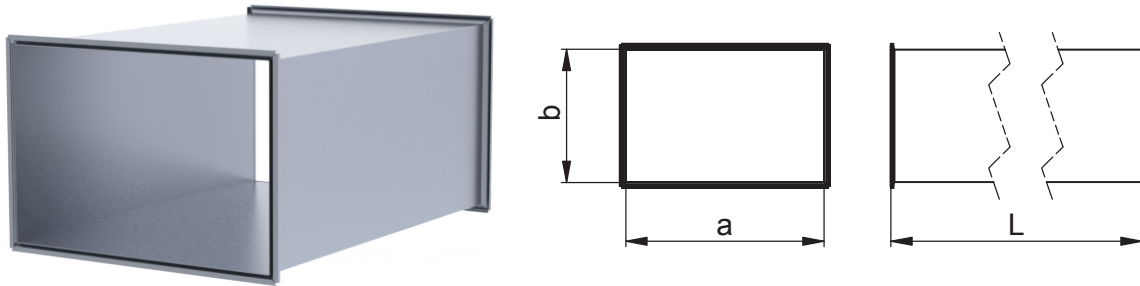

Rectangular duct, stiffened with transverse corrugations to reduce the risk of noise generation. Larger dimensions have stiffened with rods or U-profiles. Duct standard lengths are 1250 mm and 2000 mm, when a or b >1200, standard length L=1250. Duct is equipped with Z-profile.

Stiffening

- a,b < 800 and L ≤ 2000 - without stiffening profiles.
- 800 ≤ a,b < 1300 and 500 ≤ L ≤ 2000 - stiffened with rods.
- a,b ≥ 1300 and 500 ≤ L ≤ 2000 - Reinforced with U-profile.

Product codes

	EKT	-	Material	-	a x b	-	L	-	Z	-	U
Product											
Material											
	Galvanized steel (DX51D+Z275), standard material ZM – Zinc-magnesium coated steel (DX51D+ZM310) H – Acidproof stainless steel AISI 316										
Dimensions a x b											
Length L											
Duct connection											
Reinforced with U-profile											

Example: EKT-H 800x400/L=1250 Z/Z
EKT-H 800x400/L=1250 Z/Z U