


**NALHE End Cap, Insulated**

Insulated end cap maintenance door for duct.


Used fire insulation meets the testing methods requirements according to IMO FTP-Code part 1.

Fire insulation strengths in accordance with EN-13501-1.

Nominal size Ø d (mm)	EI60		EI120	
	i (mm)	Weight (kg)	i (mm)	Weight (kg)
100	60	0,4	100	0,5
125	60	0,7	100	0,8
160	60	1,0	100	1,1
200	60	1,2	100	1,4
250	60	1,8	100	2
315	60	2,4	100	2,7
400	60	4,0	100	4,5
500	80	5,9	100	6,3
630	80	8,6	100	9,2
800	80	13,2	100	14
1000	80	22,6	100	24
1250	80	32,9	100	35

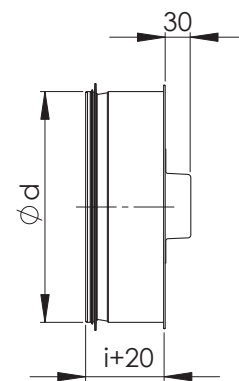

**Product Marking**

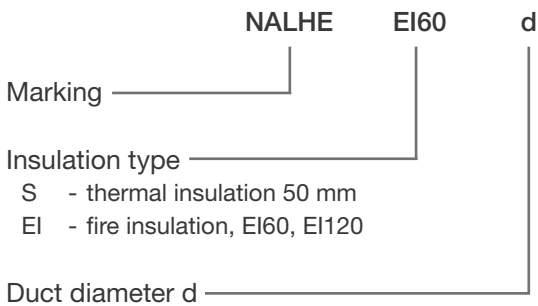

Example: NALHE EI60 315