

NALMHE End Cap, Insulated


Insulated end cap maintenance door for part.

Used fire insulation meets the testing methods requirements according to IMO FTP-Code part 1.


Fire insulation strengths in accordance with EN 13501-1.



Nominal size Ø D (mm)	EI60		EI120	
	i (mm)	Weight (kg)	i (mm)	Weight (kg)
100	60	0,4	100	0,4
125	60	0,7	100	0,7
160	60	0,8	100	1,0
200	60	1,1	100	1,3
250	60	2,1	100	2,3
315	60	2,6	100	3,0
400	60	5,6	100	6,2
500	80	7,8	100	8,2
630	80	9,8	100	10,4
800	80	15	100	15,8
1000	80	26	100	27,4
1250	80	38	100	40,1

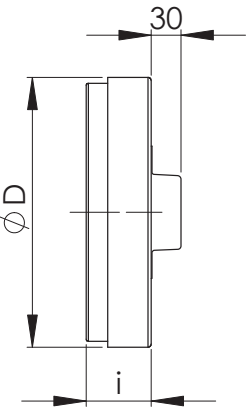

Product Marking

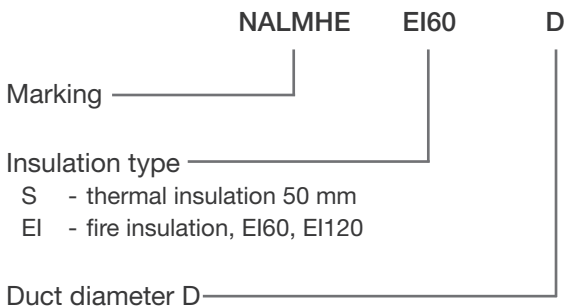

Example: NALMHE EI60 315