

KROS Regulating damper


Damper for regulating air flow in round duct systems.

- Easy to install
- Equipped with rubber gaskets
- Tightness class EN 1751, class C



Structure and dimensions


Manufactured of galvanized steel. Equipped with rubber gaskets. Polyamide bushings (max +150°C). Manually adjustable.

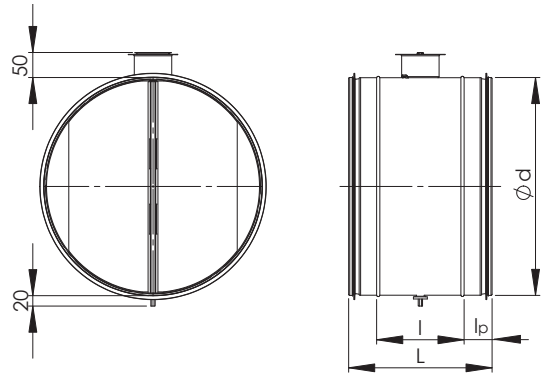


Nominal size, d mm	l, mm	l _p , mm	L, mm	Weight, kg
80	95	30	155	0,29
100	95	30	155	0,35
125	95	30	155	0,45
160	95	30	155	0,6
200	120	50	220	0,8
250	120	50	220	1,3
315	120	50	220	1,8
400	133	61	255	3,0
500	133	61	255	4,4
630	130	65	255	6,0

Technical data


KROS 100

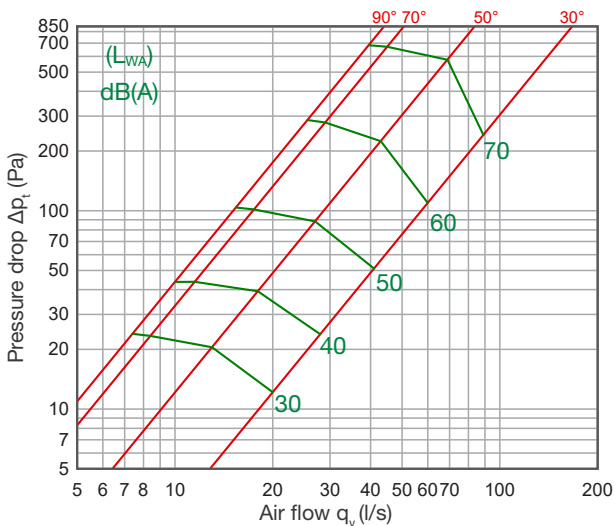


KROS 125

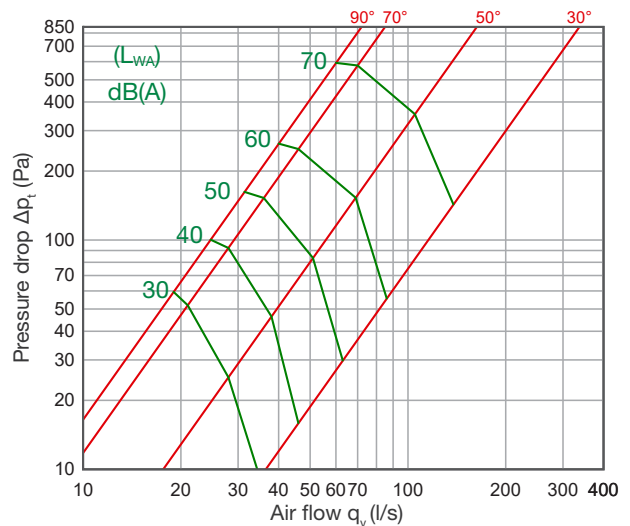


KROS 160

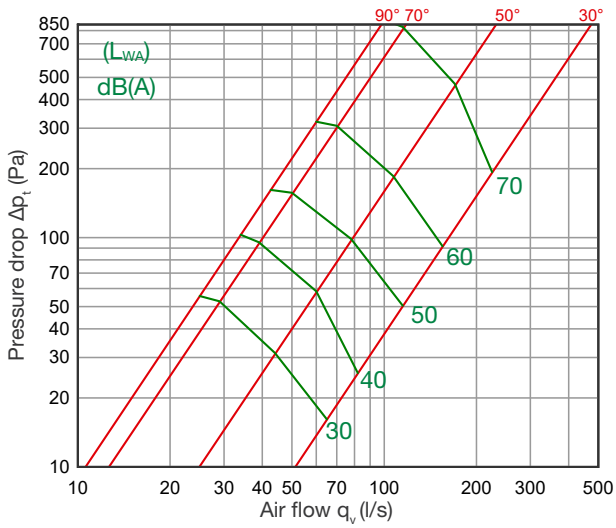


KROS 200

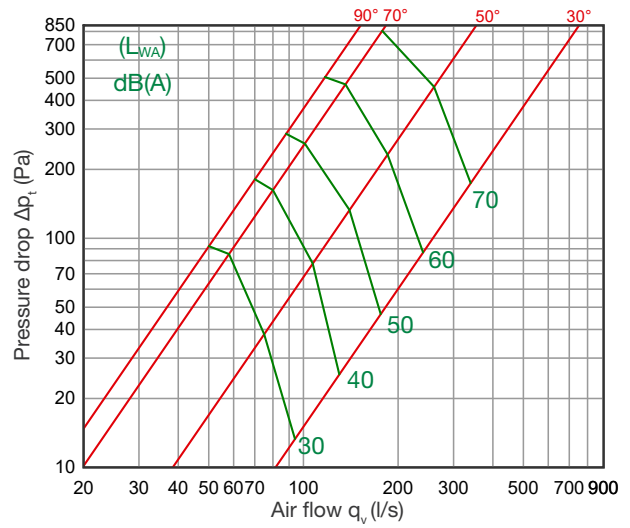


KROS 250

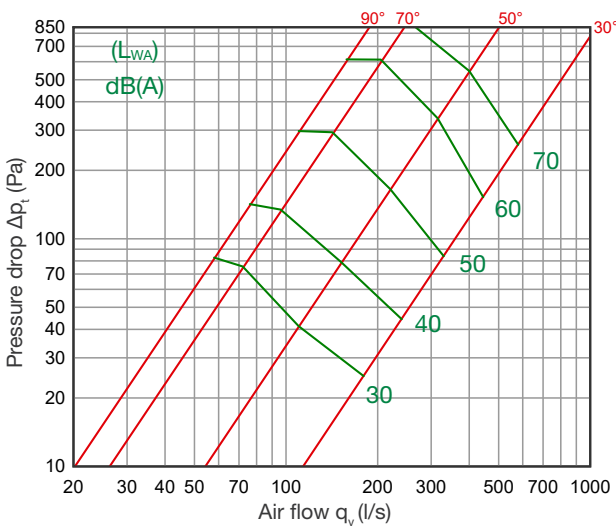


KROS 315

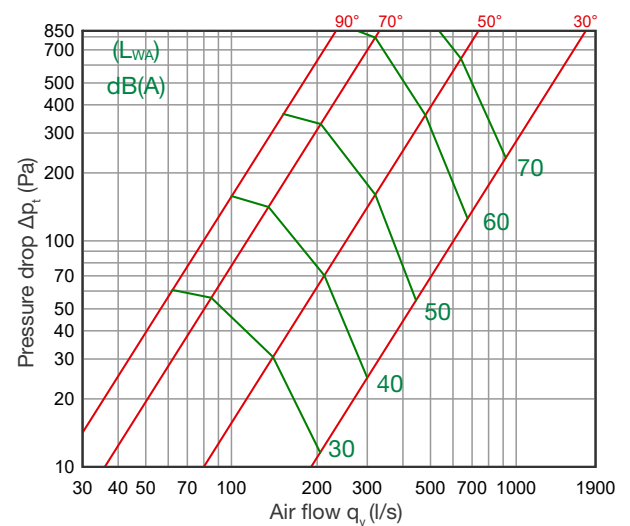


KROS 400

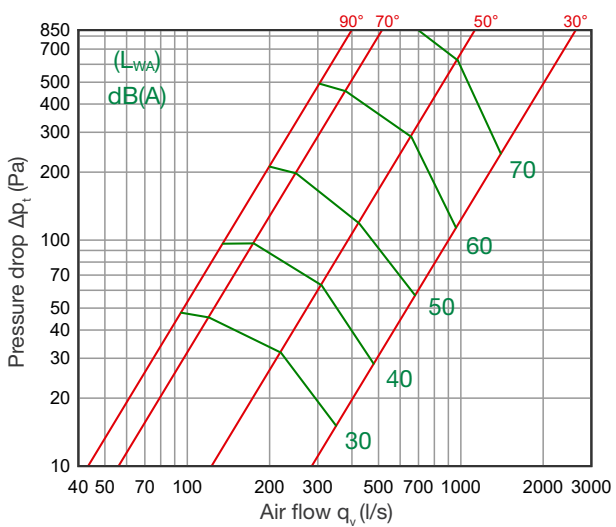


KROS 500

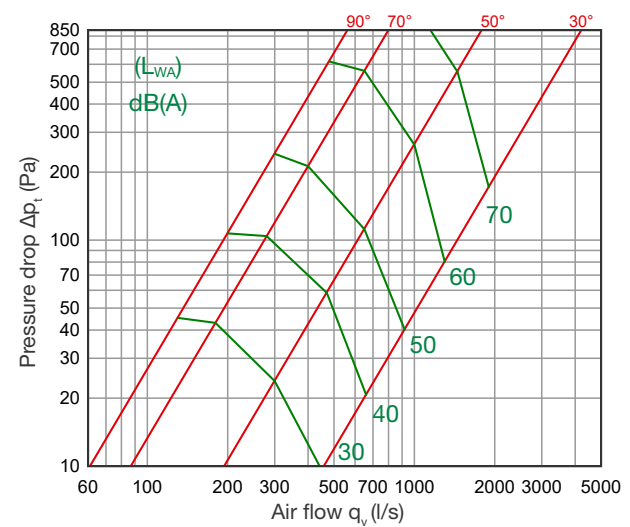

KROS 630

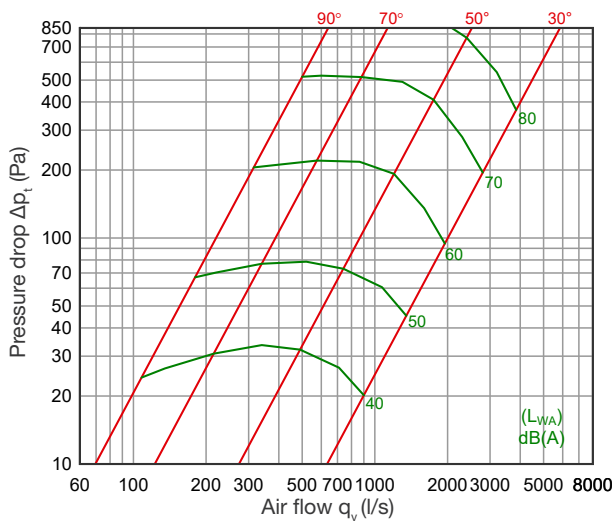

Product marking

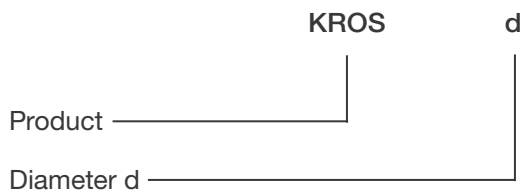

Example: KROS 315

Installation

Installation according to NORDduct installation instructions.