


NTO Spiraalatoru

NTO spiraalatorud on valmistatud lehtterasest. Toru standardpikkused on 3 ja 6 m.

Spiraalatorud täidavad M1-puhtusklassi ja tihedusklassi D nõudeid.



Nimimõõt d (mm)	Kaal (kg/m)		
	H	Al	ZM
100	1,4	0,7	1,3
125	1,7	0,8	1,6
160	2,2	1,1	2,1
200	2,7	1,3	2,6
250	3,3	1,6	3,2
315	4,0	2,0	3,9
400	8,1	2,9	7,9
500	10,2	3,6	10,0
630	12,3	4,3	12,0
800	15,5	5,5	15,2
1000	19,8	-	25
1250	24,6	-	31

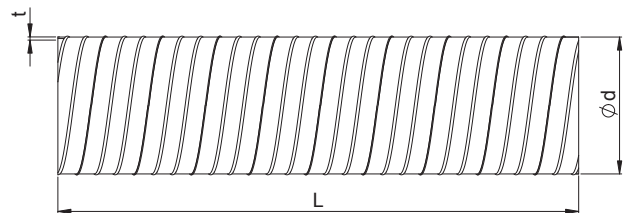

Toruprofiilid


Mõõdud 100-250 mm



Mõõdud 315-1250 mm



Markeerimine

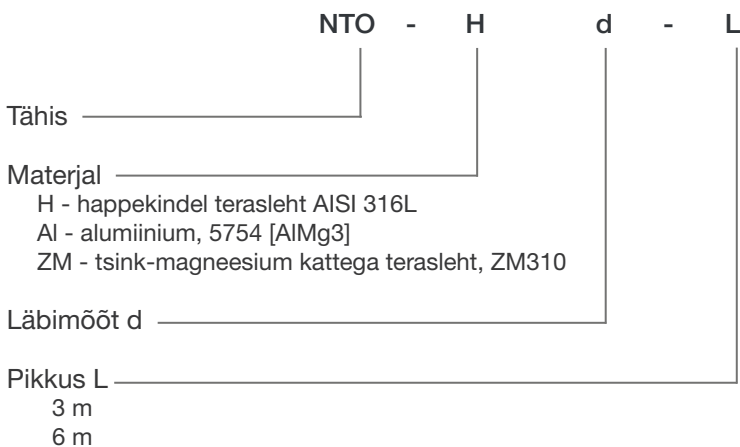

Näidis: NTO-H 315-3