


MSKI/MSPI Silencer

MSK/MSP-rectangular silencer for rectangular duct systems. Suitable for use in exhaust, intake and discharge, supply air handling systems.

The elements are available in a widths 100, 150 and 200 mm.
Standard lengths of rectangular silencers are 1250 and 2000 mm.

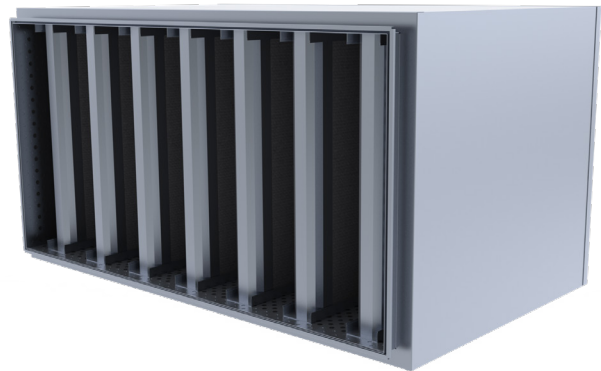


Design and Dimensions

MSKI and MSPI-silencers with noise reducing insulation are covered with galvanized sheet metal plate and the internal casing are made of perforated sheet metal plate. Dimensions **a** and **b** are for the internal casing. Z-flange are attached to the internal casing at both ends.

MSKI absorption material: mineral wool board, covered with black glass fibre textile.

MSPI absorption material: synthetic sound insulation.
For ventilation systems used in aggressive environments (or as special requirements) MSKI/MSPI silencers could be made of aluminium, stainless steel or acid-proof steel in special order.

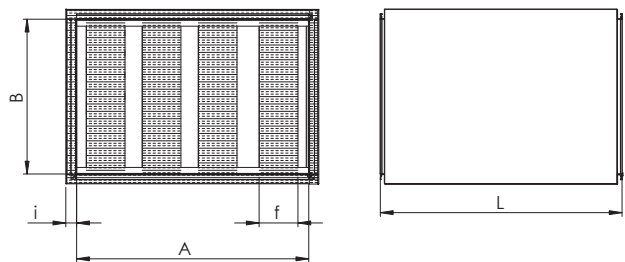

Product codes

MSKI - i - A x B - L - f x n

Marking

- MSKI – absorption material mineral wool
- MSPI – absorption material synthetic sound insulation

Insulation

Width A x Height B

Length L

Element width x Quantity

Example: **MSKI 600x400-1000-100x3-MP50**
 MSPI 600x400-1000-100x3-MP50