


## NIL-T Slide-in coupling

Long coupling allows for the adjustment of duct length in the fitting area.

| Nominal size<br>d | $l_1$ ,<br>mm | $l$ ,<br>mm | $l_p$ ,<br>mm | Weight,<br>kg |
|-------------------|---------------|-------------|---------------|---------------|
| 100               | 159           | 5           | 30            | 0,35          |
| 125               | 159           | 5           | 30            | 0,4           |
| 160               | 159           | 5           | 30            | 0,5           |
| 200               | 159           | 5           | 30            | 0,7           |
| 250               | 202           | 7           | 50            | 0,9           |
| 315               | 202           | 7           | 50            | 1,1           |
| 400               | 202           | 7           | 50            | 2,0           |
| 500               | 301           | 7           | 61            | 2,8           |
| 630               | 301           | 7           | 61            | 3,5           |
| 800               | 475           | 16          | 96            | 6,3           |
| 1000              | 480           | 16          | 110           | 13,5          |

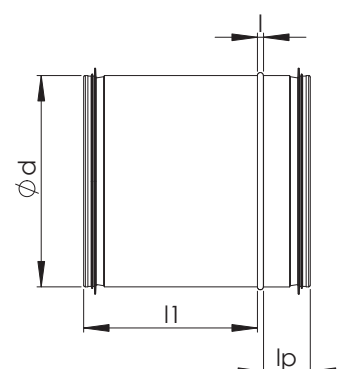

### Product code

NIL-T   -   ZM   -   d  
 \_\_\_\_\_  
 Marking \_\_\_\_\_  
 Material \_\_\_\_\_  
 (-) – galvanized steel (Z275)  
 ZM – zinc-magnesium coated steel (ZM310)  
 Diameter d \_\_\_\_\_

**Example: NIL-T 315**